

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 October 2003 (09.10.2003)

PCT

(10) International Publication Number
WO 03/082480 A1

(51) International Patent Classification⁷: B05D 1/12,
B05B 12/00, 7/24

(21) International Application Number: PCT/JP03/03861

(22) International Filing Date: 27 March 2003 (27.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002-095922 29 March 2002 (29.03.2002) JP

(71) Applicant (for all designated States except US): NORDSON CORPORATION [US/US]; 28601 Clemens Road, Westlake, OH 44145-1119 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MATSUNAGA, Masafumi [JP/JP]; c/o Nordson Kabushiki Kaisha, Toshin Building 8 Floor, 5-21, Katsushima 1-chome, Shinagawa-ku, Tokyo 140-0012 (JP). AOYAGI, Takayuki

[JP/JP]; c/o Nordson Kabushiki Kaisha, Toshin Building 8 Floor, 5-21, Katsushima 1-chome, Shinagawa-ku, Tokyo 140-0012 (JP). TERAOKA, Kouki [JP/JP]; c/o Nordson Kabushiki Kaisha, Toshin Building 8 Floor, 5-21, Katsushima 1-chome, Shinagawa-ku, Tokyo 140-0012 (JP).


(74) Agents: OKABE, Masao et al.; No. 602, Fuji Bldg., 2-3, Marunouchi 3-chome, Chiyoda-ku, Tokyo 100-0005 (JP).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: LIQUID DISPENSING METHOD AND APPARATUS

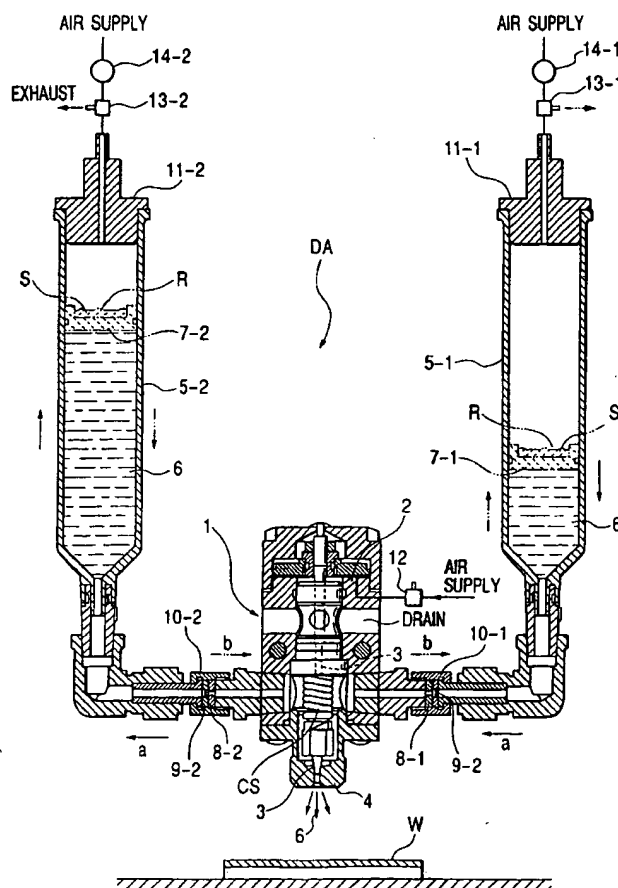

(57) Abstract: A method of dispensing a liquid, which handles a minimum amount of liquid without wasting it and to dispense and spray an exact amount of the liquid without precipitating solid particles. The method including the steps of regulating a flow rate of liquid in a flow passage by orifices 8-1, 8-2 while letting the liquid flow through flow passages 10-1 and 10-2 between syringes 5-1 and 5-2 by applying a pressure of 0.001 MPa to 10 MPa to liquid 6 including solid particles and filled in one syringe vessel 5-1 and by setting a pressure of liquid in the other syringe 5-2 at a lower level than the pressure of liquid in the syringe 5-1 and dispensing the liquid from the flow passage by an auto dispensing valve 1.

BEST AVAILABLE COPY